




ASTM D4595-PUNCH DIE-WIDE WIDTH TEST-250 X 200 MM

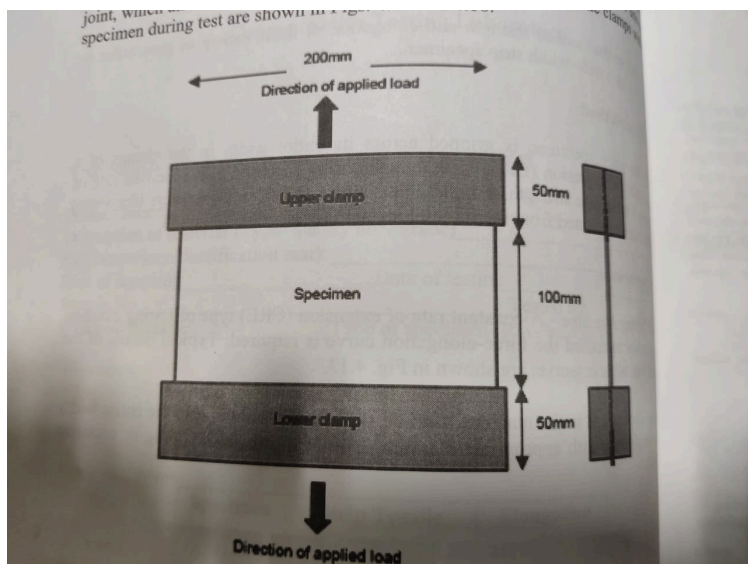

Compliance Standards

ASTM D4595, ISO 10319, IS 13162 (PART-5)

Applications:

To prepare specimen for wide width test of Geotextile Material.

Notes

(1) No warranty is applicable in case of punch die as smooth & uninterrupted operation of dies depends on various other governing factors such as Proper Alignment of dies, Bottom Support, Technical skills of the operator etc.

(2) This is purely visual and skill based work. Any random un-skilled operator can damage the die and EIE shall not be held responsible for the same.

(3) Use of **Saag Wood / Teak Wood** as bottom support to withstand the actual force of press after the specimen has been cut is highly recommend. **Die shall not be used without reliable Saag Wood / Teak Wood as bottom support.**

Technical Specification

•Length (mm)	:	250 mm (10 Inches)
•Width (mm)	:	200 mm (8 Inches)
•Maximum cutting depth	:	20 mm

Corporate Office:

A-1301, BVR Ek, Opp. Hotel Inder Residency,
Near Gujarat College, Ellisbridge,
Ahmedabad-380 006.
Phone : (079) 6621 1234
Website : www.eieinstruments.com

Calibration Laboratory:

Survey No. 1098, Nr. Mahakali Temple,
Opp. Primary School, Village Kubadthal,
Tal-Daskroi, Ahmedabad-382 433.
Phone: (079)-3520 8300
E-mail : info@eieinstruments.com

GST TIN No. : 24AABCE4018L1ZU
I.T. PAN No. : AABCE 4018L
IEC No. : 0813026598 Dt. 04/03/2014
CIN No. : U29199GJ2004PTC045078
TAN No. : AHME00572F